


CSCI 2330 – x86-64 Movement and Addressing Exercises

1. Assuming the following memory contents and register values, compute the values given by the x86-64 operands in the table below. Assume a 4-byte operand size in all cases.

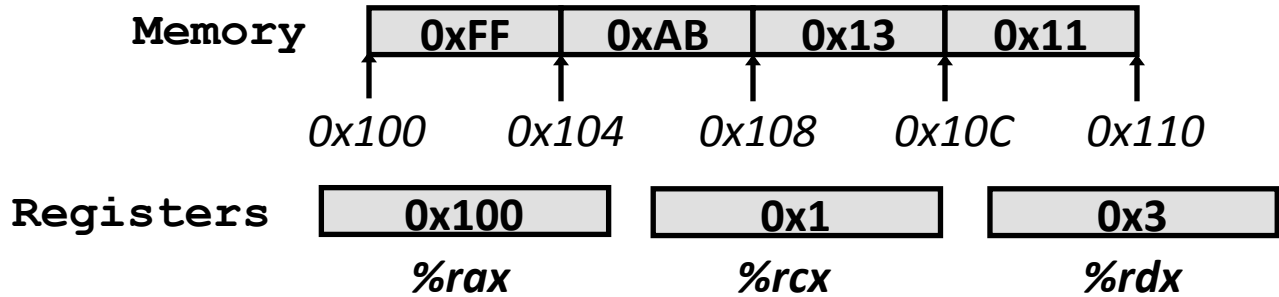

Operand	Value
%rax	
0x104	
\$0x108	
(%rax)	
4(%rax)	
9(%rax,%rdx)	
260(%rcx,%rdx)	
0xFC(,%rcx,4)	
(%rax,%rdx,4)	

2. What's **wrong** with each of the following movement commands?

- movq %eax, %rdx
- movl \$0xF, (%ebx)
- movl %rax, (%rsp)
- movq %rax, \$0x123
- movw (%rax), 4(%rsp)