




Procedure Call Registers

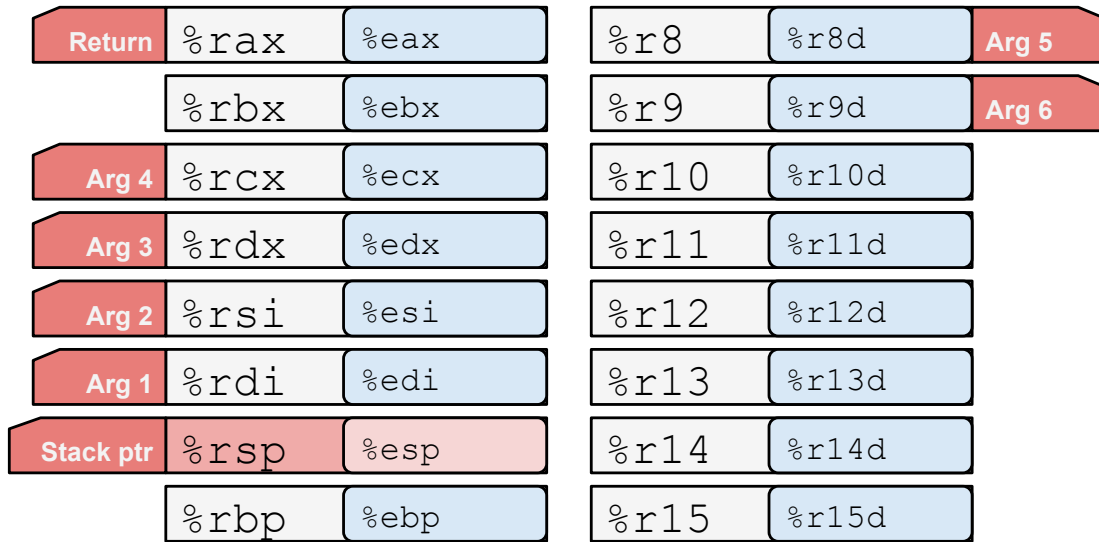


Call Stack

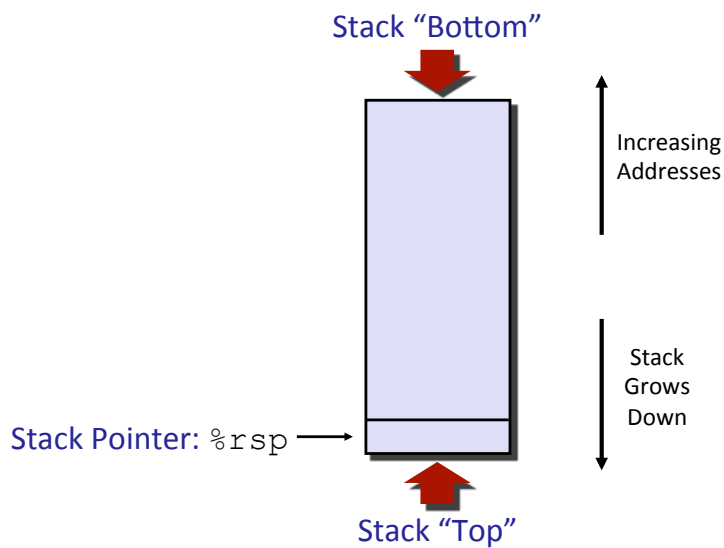


Stack Operations

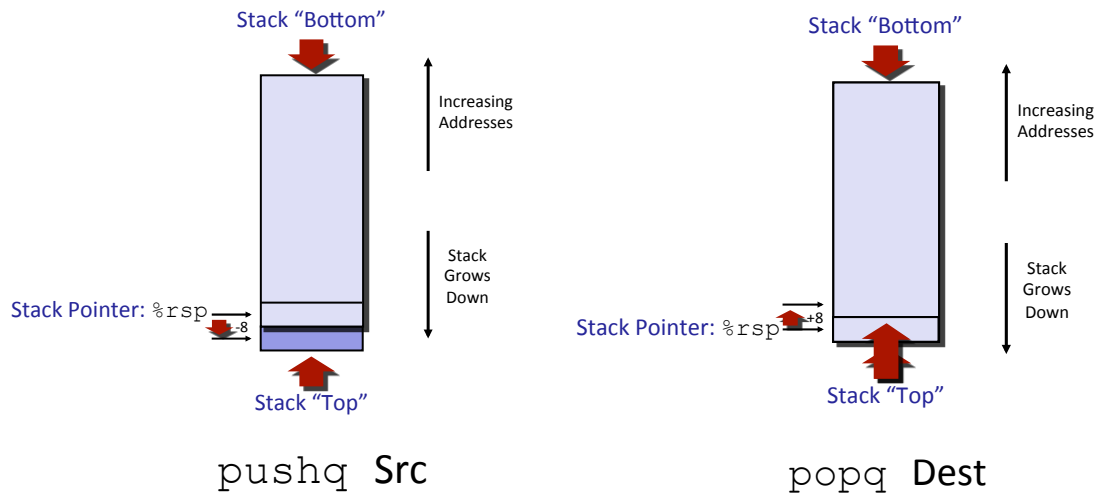


Procedure Call Example (1)

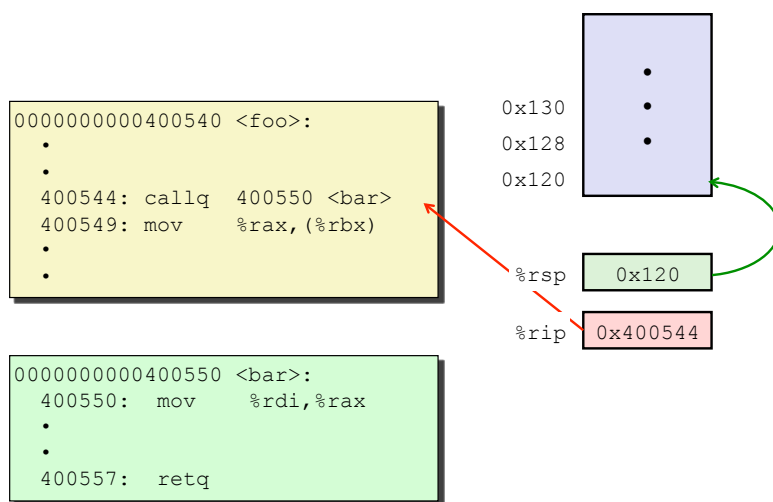

Procedure Call Example (2)

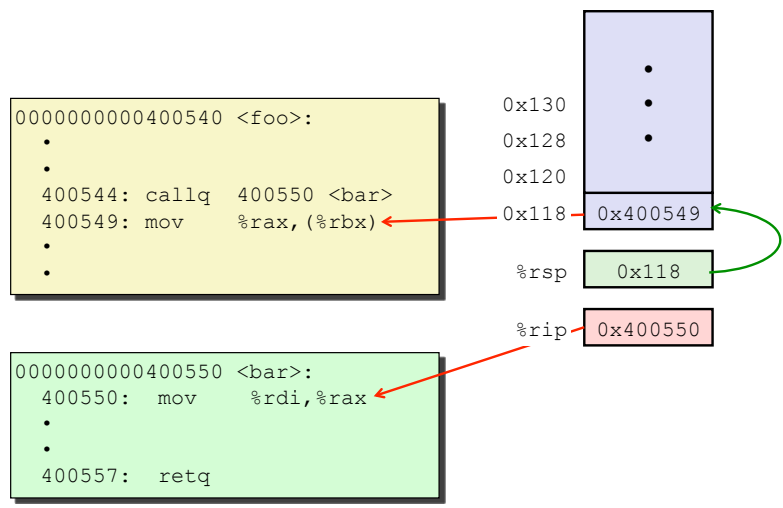


Procedure Call Example (3)

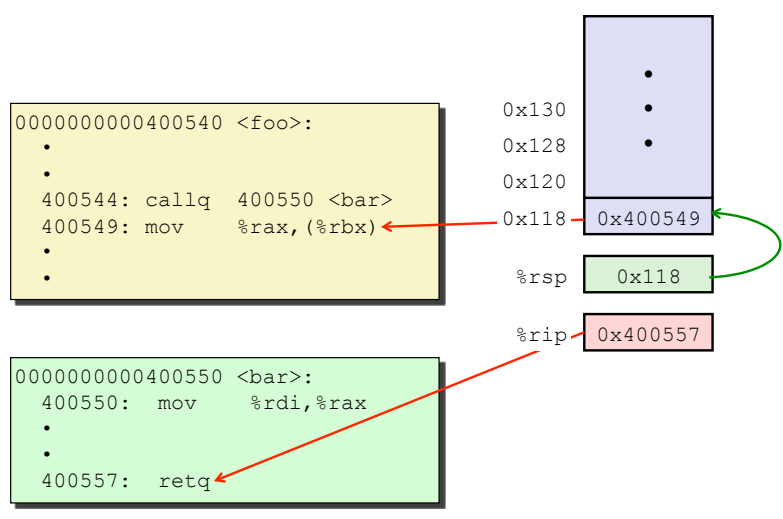

Procedure Call Example (4)

```
0000000000400540 <foo>:  
.  
.  
400544: callq 400550 <bar>  
400549: mov  %rax, (%rbx)  
.  
.
```


```
0000000000400550 <bar>:  
400550: mov  %rdi,%rax  
.  
.  
400557: retq
```




Passing Data

Registers


- First 6 arguments

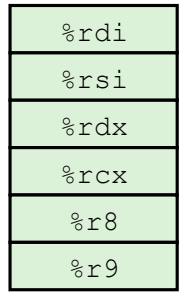


- Return value



Stack



Stack Frames

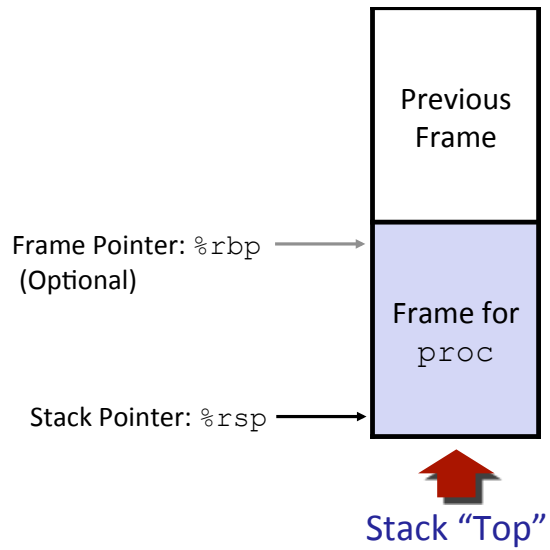

Call Chain Example


```
yoo (...)  
{  
  .  
  .  
  who ();  
  .  
  .  
}
```

```
who (...)  
{  
  . . .  
  amI ();  
  . . .  
  amI ();  
  . . .  
}
```


```
amI (...)  
{  
  .  
  .  
  .  
  amI ();  
  .  
  .  
}
```

Procedure amI () is recursive


Example Call Chain

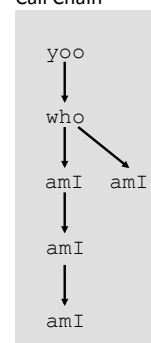


Stack Frame Allocation (1)

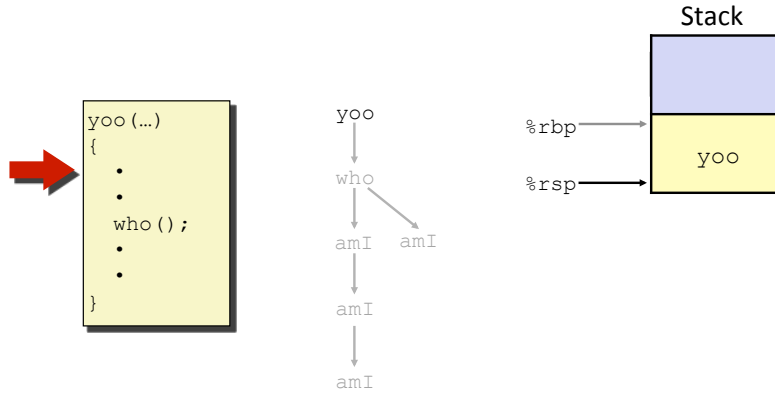


Stack Frame Allocation (2)

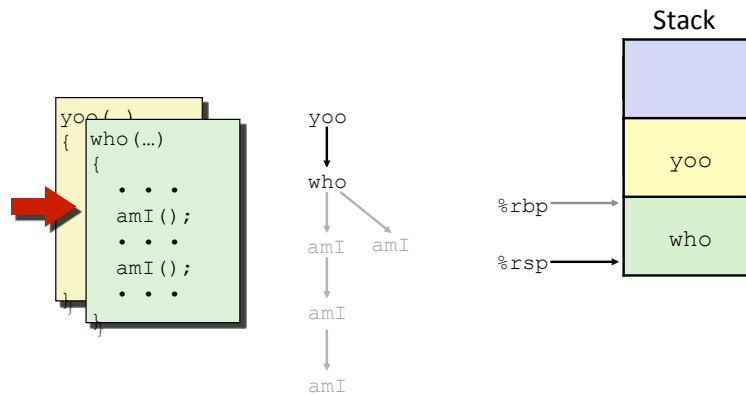


Stack Frame Allocation (3)

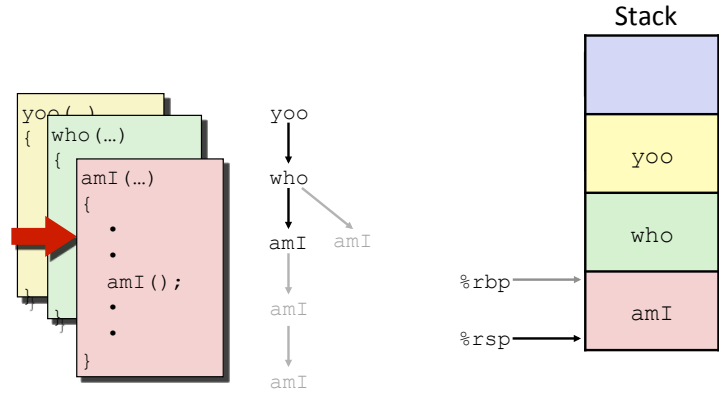


Stack Frame Allocation (4)

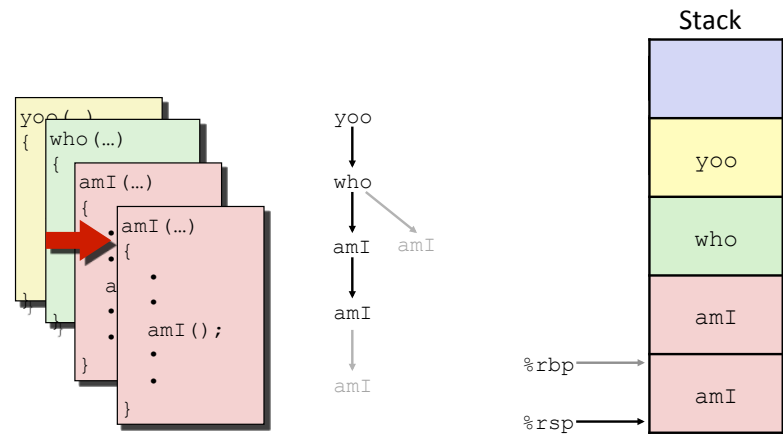


Stack Frame Allocation (5)

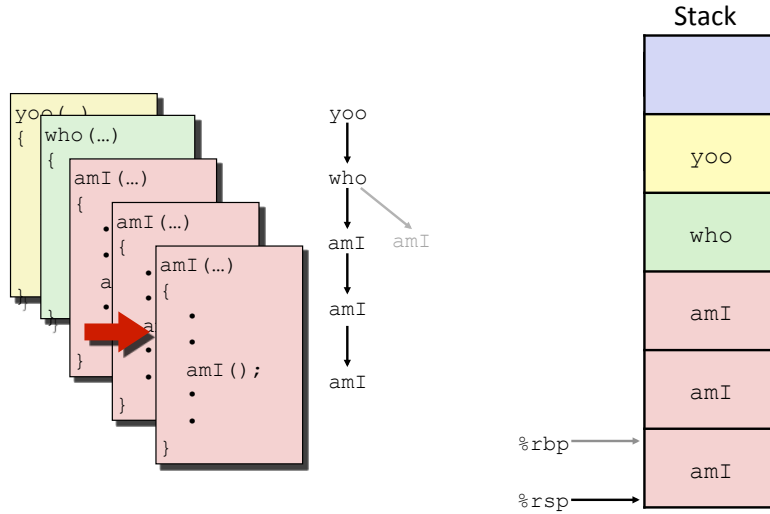


Stack Frame Allocation (6)

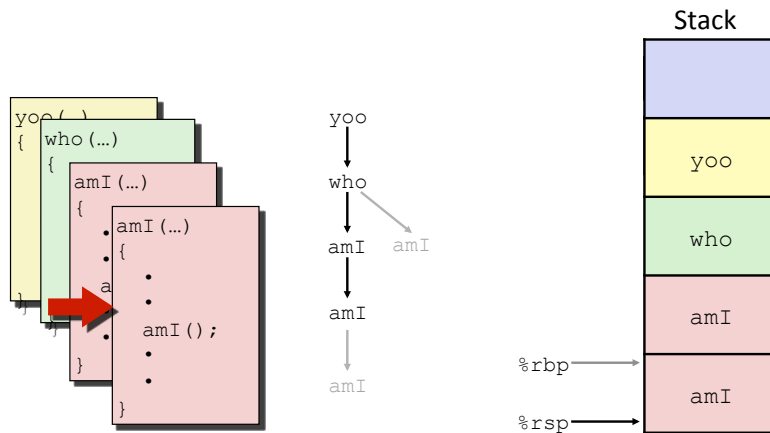


Stack Frame Allocation (7)

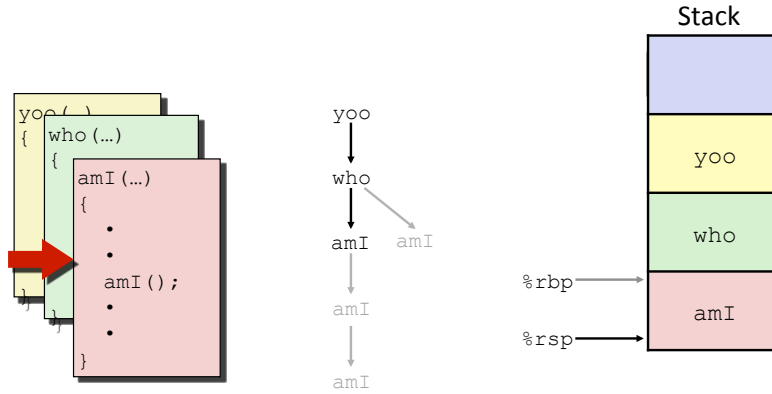


Stack Frame Allocation (8)

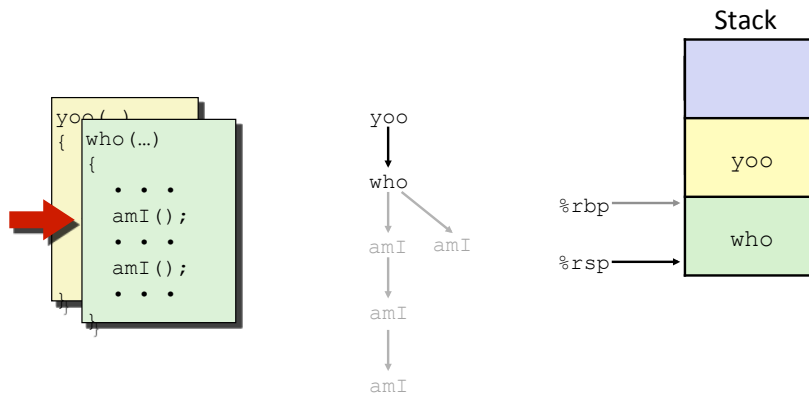


Stack Frame Allocation (9)

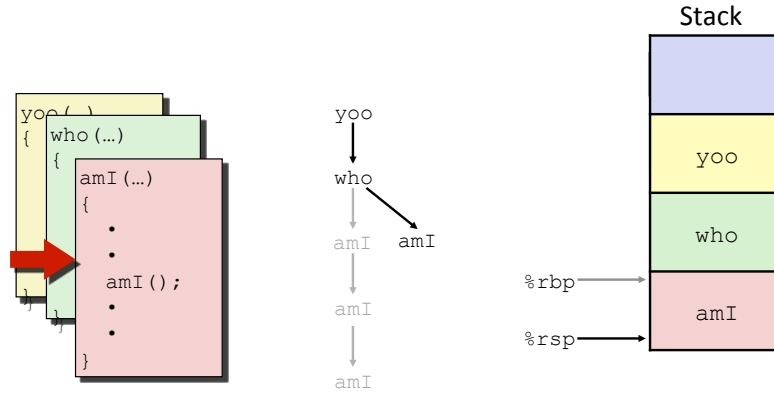


Stack Frame Allocation (10)

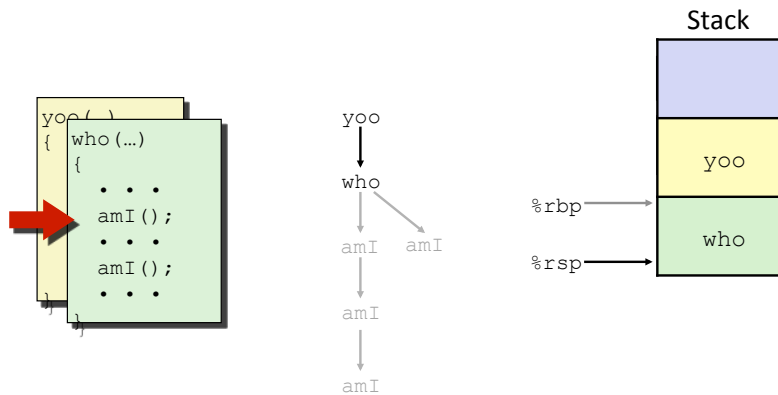

Stack Frame Allocation (11)

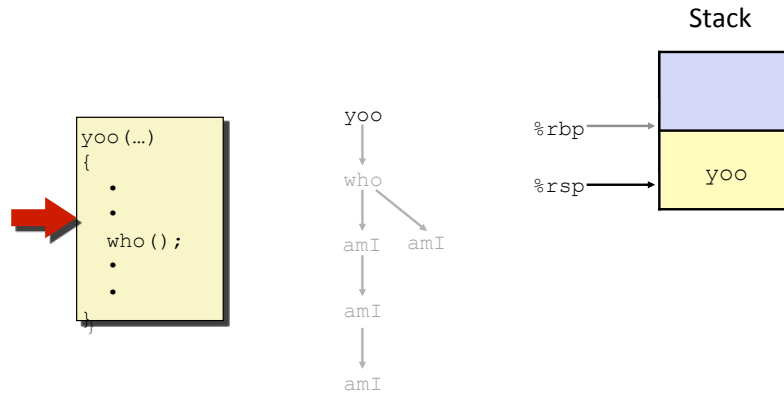

Stack Frame Components

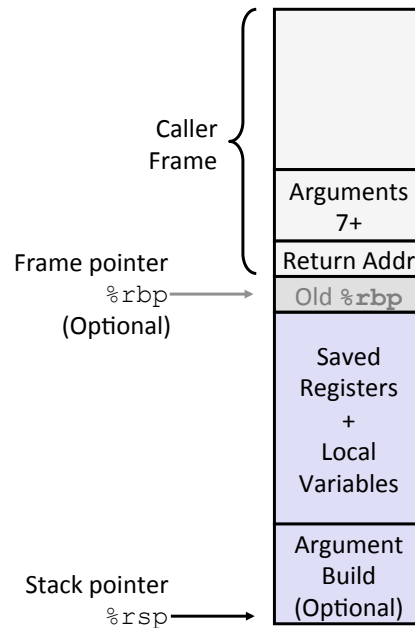

Stack Example: incr

```
long incr(long *p, long val) {
    long x = *p;
    long y = x + val;
    *p = y;
    return x;
}
```


```
incr:
    movq    (%rdi), %rax
    addq    %rax, %rsi
    movq    %rsi, (%rdi)
    ret
```

Register	Use(s)
%rdi	Argument p
%rsi	Argument val, y
%rax	x, Return value

Using the Stack (1)


```
long call_incr() {
    long v1 = 15213;
    long v2 = incr(&v1, 3000);
    return v1+v2;
}
```

Initial Stack Structure



```
call_incr:
    subq    $16, %rsp
    movq    $15213, 8(%rsp)
    movl    $3000, %esi
    leaq    8(%rsp), %rdi
    call   incr
    addq    8(%rsp), %rax
    addq    $16, %rsp
    ret
```

Resulting Stack Structure




Using the Stack (2)

```
long call_incr() {  
    long v1 = 15213;  
    long v2 = incr(&v1, 3000);  
    return v1+v2;  
}
```

```
call_incr:  
    subq    $16, %rsp  
    movq    $15213, 8(%rsp)  
    movl    $3000, %esi  
    leaq    8(%rsp), %rdi  
    call    incr  
    addq    8(%rsp), %rax  
    addq    $16, %rsp  
    ret
```

Stack Structure




Register	Use(s)
%rdi	&v1
%rsi	3000

Using the Stack (3)

```
long call_incr() {  
    long v1 = 15213;  
    long v2 = incr(&v1, 3000);  
    return v1+v2;  
}
```

```
call_incr:  
    subq    $16, %rsp  
    movq    $15213, 8(%rsp)  
    movl    $3000, %esi  
    leaq    8(%rsp), %rdi  
    call    incr  
    addq    8(%rsp), %rax  
    addq    $16, %rsp  
    ret
```

Stack Structure



Register	Use(s)
%rdi	&v1
%rsi	3000


```
incr:  
    movq    (%rdi), %rax  
    addq    %rax, %rsi  
    movq    %rsi, (%rdi)  
    ret
```

Using the Stack (4)

```
long call_incr() {  
    long v1 = 15213;  
    long v2 = incr(&v1, 3000);  
    return v1+v2;  
}
```


```
call_incr:  
    subq    $16, %rsp  
    movq    $15213, 8(%rsp)  
    movl    $3000, %esi  
    leaq    8(%rsp), %rdi  
    call   incr  
    addq    8(%rsp), %rax  
    addq    $16, %rsp  
    ret
```

Stack Structure



Register	Use(s)
%rax	Return value

Updated Stack Structure




Using the Stack (5)

```
long call_incr() {  
    long v1 = 15213;  
    long v2 = incr(&v1, 3000);  
    return v1+v2;  
}
```


```
call_incr:  
    subq    $16, %rsp  
    movq    $15213, 8(%rsp)  
    movl    $3000, %esi  
    leaq    8(%rsp), %rdi  
    call   incr  
    addq    8(%rsp), %rax  
    addq    $16, %rsp  
    ret
```

Updated Stack Structure




Register	Use(s)
%rax	Return value


Final Stack Structure



Stack Frame Components

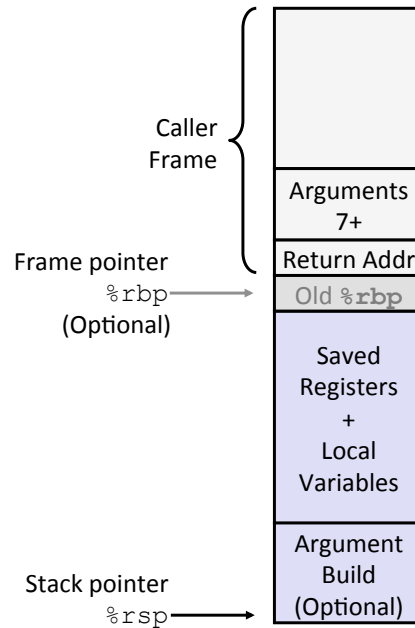

Register Conventions

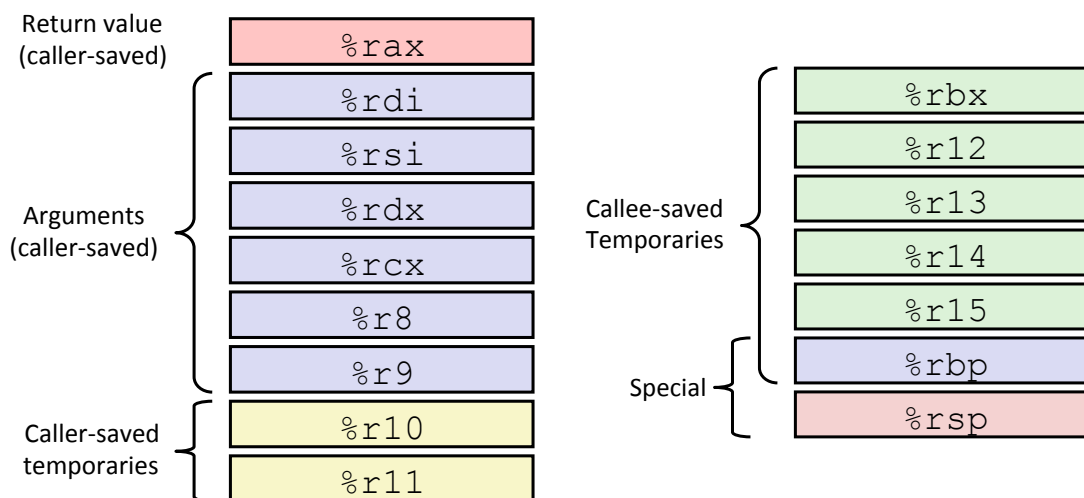


Callee-Saved Example (1)


```
long call_incr2(long x) {  
    long v1 = 15213;  
    long v2 = incr(&v1, 3000);  
    return x+v2;  
}
```

```
call_incr2:  
    pushq    %rbx  
    subq    $16, %rsp  
    movq    %rdi, %rbx  
    movq    $15213, 8(%rsp)  
    movl    $3000, %esi  
    leaq   8(%rsp), %rdi  
    call   incr  
    addq   %rbx, %rax  
    addq   $16, %rsp  
    popq   %rbx  
    ret
```

Initial Stack Structure



Resulting Stack Structure




Callee-Saved Example (2)


```
long call_incr2(long x) {  
    long v1 = 15213;  
    long v2 = incr(&v1, 3000);  
    return x+v2;  
}
```

```
call_incr2:  
    pushq    %rbx  
    subq    $16, %rsp  
    movq    %rdi, %rbx  
    movq    $15213, 8(%rsp)  
    movl    $3000, %esi  
    leaq   8(%rsp), %rdi  
    call   incr  
    addq   %rbx, %rax  
    addq   $16, %rsp  
    popq   %rbx  
    ret
```


Resulting Stack Structure



Pre-return Stack Structure



Stack Frame Components

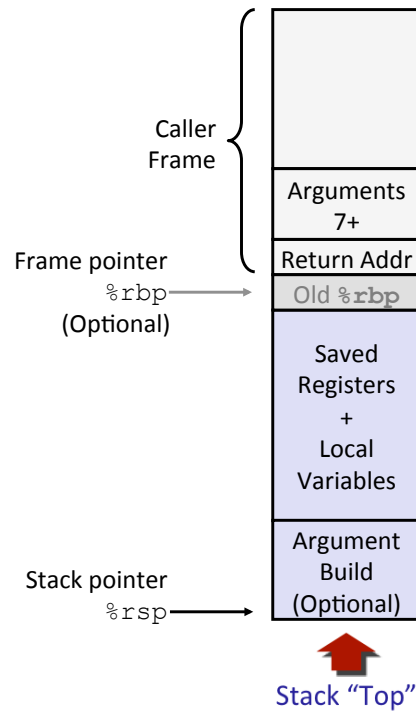

Recursion Example

```
/* Recursive popcount */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1)
            + pcount_r(x >> 1);
}
```

```
pcount_r:
    movl    $0, %eax
    testq   %rdi, %rdi
    je     .L6
    pushq   %rbx
    movq    %rdi, %rbx
    andl    $1, %ebx
    shrq    %rdi
    call    pcount_r
    addq    %rbx, %rax
    popq    %rbx
.L6:
    rep; ret
```

Recursion Base Case

```

/* Recursive popcount */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1)
            + pcount_r(x >> 1);
}

```

```

pcount_r:
    movl    $0, %eax
    testq   %rdi, %rdi
    je      .L6
    pushq   %rbx
    movq    %rdi, %rbx
    andl    $1, %ebx
    shrq    %rdi
    call    pcount_r
    addq    %rbx, %rax
    popq    %rbx
.L6:
    rep; ret

```

Register	Use(s)	Type
%rdi	x	Argument
%rax	Return value	Return value

Recursion Register Save

```

/* Recursive popcount */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1)
            + pcount_r(x >> 1);
}


```

```

pcount_r:
    movl    $0, %eax
    testq   %rdi, %rdi
    je      .L6
    pushq   %rbx
    movq    %rdi, %rbx
    andl    $1, %ebx
    shrq    %rdi
    call    pcount_r
    addq    %rbx, %rax
    popq    %rbx
.L6:
    rep; ret

```

Register	Use(s)	Type
%rdi	x	Argument



Recursion Call Setup

```
/* Recursive popcount */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1)
            + pcount_r(x >> 1);
}
```

```
pcount_r:
    movl    $0, %eax
    testq  %rdi, %rdi
    je     .L6
    pushq  %rbx
    movq   %rdi, %rbx
    andl   $1, %ebx
    shrq   %rdi
    call   pcount_r
    addq   %rbx, %rax
    popq   %rbx
.L6:
    rep; ret
```

Register	Use(s)	Type
%rdi	x >> 1	Rec. argument
%rbx	x & 1	Callee-saved

Recursive Call

```
/* Recursive popcount */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1)
            + pcount_r(x >> 1);
}
```

```
pcount_r:
    movl    $0, %eax
    testq  %rdi, %rdi
    je     .L6
    pushq  %rbx
    movq   %rdi, %rbx
    andl   $1, %ebx
    shrq   %rdi
    call   pcount_r
    addq   %rbx, %rax
    popq   %rbx
.L6:
    rep; ret
```

Register	Use(s)	Type
%rbx	x & 1	Callee-saved
%rax	Recursive call return value	

Recursion Result

```
/* Recursive popcount */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1)
            + pcount_r(x >> 1);
}
```

```
pcount_r:
    movl    $0, %eax
    testq   %rdi, %rdi
    je     .L6
    pushq   %rbx
    movq    %rdi, %rbx
    andl    $1, %ebx
    shrq    %rdi
    call    pcount_r
    addq    %rbx, %rax
    popq    %rbx
.L6:
    rep; ret
```

Register	Use(s)	Type
%rbx	x & 1	Callee-saved
%rax	Return value	

Recursion Result

```
/* Recursive popcount */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1)
            + pcount_r(x >> 1);
}
```

```
pcount_r:
    movl    $0, %eax
    testq   %rdi, %rdi
    je     .L6
    pushq   %rbx
    movq    %rdi, %rbx
    andl    $1, %ebx
    shrq    %rdi
    call    pcount_r
    addq    %rbx, %rax
    popq    %rbx
.L6:
    rep; ret
```

Register	Use(s)	Type
%rax	Return value	Return value

